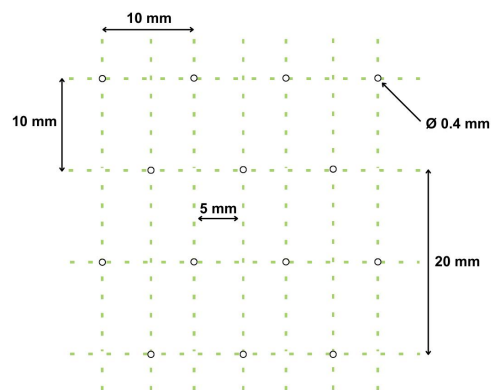


Perforated film data sheet

Code #VC011P

Technical features	Unit	Value
Horizontal distance between hole centers	mm	10 (±0.5)
Horizontal distance between staggered columns	mm	5 (±0.5)
Vertical distance between hole centers	mm	20 (±1)
Vertical distance between staggered lines	mm	10 (±1)
Total holes per square meter	holes / m ²	10000
Perforation density	holes / cm ²	1
Hole diameter	mm	0.4 (+0.1 -0.2)
Hole area	mm ²	0.126
POA (open area percentage)	%	0.126


SALES & ORDER PROCESSING

28th of October St No 8A, 37300
Agria, Greece, EU

EU ORDERING INFO

Tel: +30 24280 92210
Email: sales@fibermax.eu

Head office: Fibremax Ltd
35 Grafton Way, W1T 5DB
London, UK