

Flow fabric data sheet


Code # VC017

Description: Flow net fabric suitable for vacuum infusion process or light RTM. It allows controlled resin flow and resin front uniformity. Also, exhibits high drapability and memory of shape, and can withstand great pulling/peeling force.

Properties	Unit	Value
Type of material		HDPE
Areal weight	g/m ²	135 (±5%)
Thickness	mm	0.80 (±0.1 mm)
Color		Green
Max use temperature	°C	100
Purity	%	1

Usage recommendation: To avoid amine, dust or other contamination of the application surface or cured substrate, do not remove cured peel ply and flow fabric before continuing the lamination or paintwork. For easiest peeling properties do not remove before full cure (the harder the resin system, the easier the peeling).

Best storage recommendations: Store in a cool and dry environment (relative humidity between 50 - 75%.) Keep in the original packaging until use.

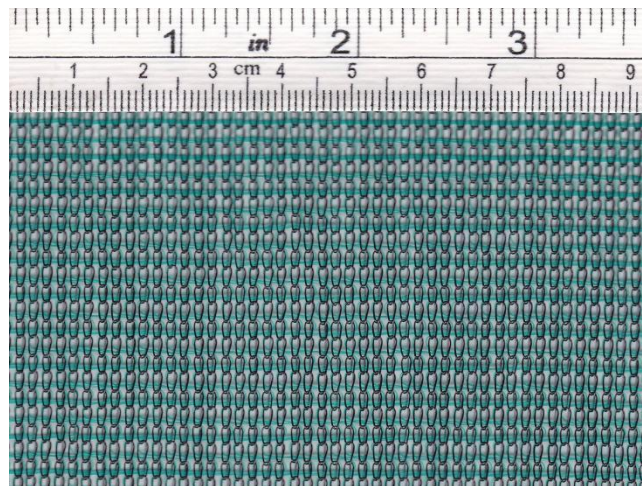

Note: Technical information furnished is based on current knowledge and believed to be correct. No warranties of any kind are made. All risk and liabilities arising from handling, storage and use of products, as well as compliance with applicable legal restrictions, rests with the user.

SALES & ORDER PROCESSING

28th of October St No 8A, 37300
Agria, Greece, EU

EU ORDERING INFO

Tel: +30 2428092210
Email: sales@fibermax.eu

Head office: Fibremax Ltd
35 Grafton Way, W1T 5DB
London, UK