


## Flow fabric + Perforated film + Peel ply data sheet

### Code #VC0173

#### PRODUCT DESCRIPTION

**VC0173** is a unique combination that integrates Flow fabric, Perforated film & Peel ply fabric into a single product. Besides a reduction in layup costs, it provides exceptional resin distribution properties and consistent air removal throughout the vacuum-assisted resin infusion process. Its excellent flexibility makes it an ideal choice for intricate mold designs.

Technical features	Unit	Value
Flow fabric + Perforated film weight	g/m <sup>2</sup>	190 ± 5%
Flow fabric weight	g/m <sup>2</sup>	140 ± 5%
Perforated film thickness	μ	26 ± 10%
Tensile strength at break (warp)	daN	136,6 ± 10%
Tensile strength at break (weft)	daN	84,3 ± 10%
Softening point	°C	100°
Maximum use temperature	°C / °F	120° / 248°

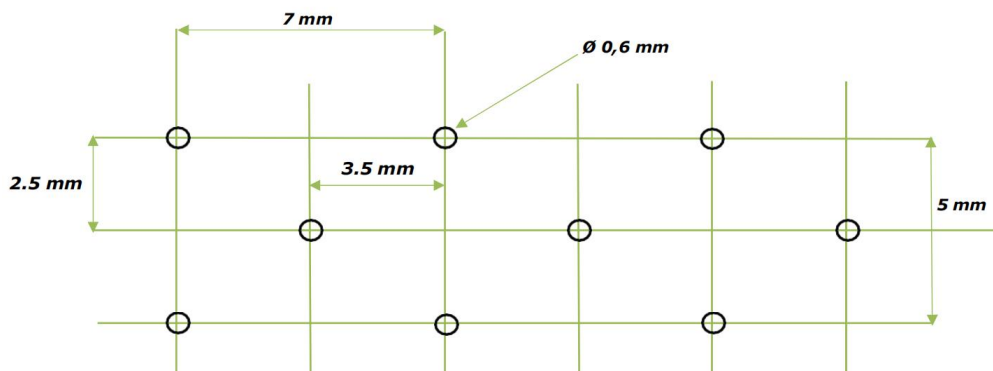

Perforated film graphic illustration