FIBERMAX™

Woven fabric data sheet

Code # G1830Z

Characteristics			
		Nominal	**Tolerance**
Mass per unit of area	(g/m^2)	1830	± 5%
Weave		3D-non crimp	
Laminate thickness	(mm)	1,46*	± 15%

Warp – Weft ratio			
		Warp	**Weft**
Fiber description		Primary: E Glass fiber (3x) 1100 tex Secondary (Z direction): E Glass fiber 134 tex	E Glass fiber (4x) 735 tex
Thread count	(ends/cm)	8	11,4
Weight distribution	(g/m^2)	951,6	878,4
Weight distribution	(%)	52	48

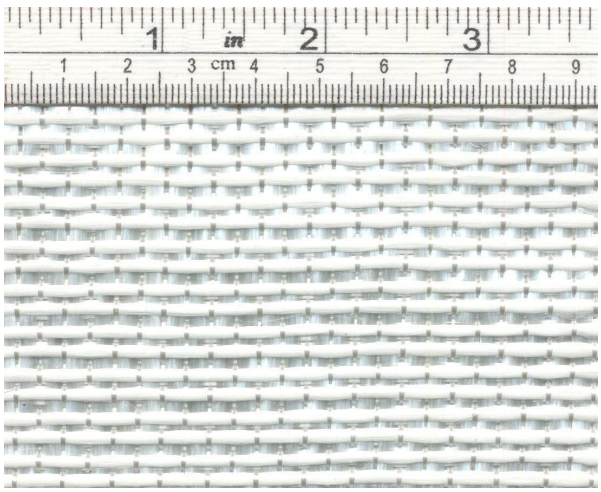

(*) Theorical thickness of compressed epoxy laminate with 40% of reinforcement in volume.

Note: Technical information furnished is based on laboratory findings and believed to be correct. No warranties of any kind are made except that the materials supplied are of standard quality. All risk and liabilities arising from handling, storage and use of products, as well as compliance with applicable legal restrictions, rests with the user.

SALES & ORDER PROCESSING
28th of October St No 8A, 37300
Agria, Greece, EU

EU ORDERING INFO
Tel: +302428092210
Email: sales@fibermax.eu

Head office: Fibremax Ltd
35 Grafton Way, W1T 5DB
London, UK