


Unidirectional fabric data sheet

Code # CG216U

Characteristics				
		Nominal	Tolerance	
Mass per unit of area	(g/m²)	216	± 5%	
Weave		Unidirectional		
Laminate thickness	(mm)	0,22*	± 5%	

Warp – Weft ratio				
		Warp	Weft	
Fiber description		3K T300 carbon fiber	3K T300 carbon fiber	
Fiber description		E Glass 300tex	E Glass 300tex	
Thread count	(ends/cm)	4,5	4,5	
Weight distribution	(g/m²)	Carbon: 54	Carbon: 54	
		Glass: 54	Glass: 54	
Total weight rate	(%)	50	50	

Note: Technical information furnished is based on laboratory findings and believed to be correct. No warranties of any kind are made except that the materials supplied are of standard quality. All risk and liabilities arising from handling, storage and use of products, as well as compliance with applicable legal restrictions, rests with the user.

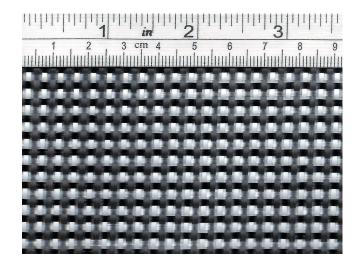

Head office: Fibremax Ltd

35 Grafton Way, W1T 5DB

London, UK